



GL-300

Quick start guide



www.spytecinc.com

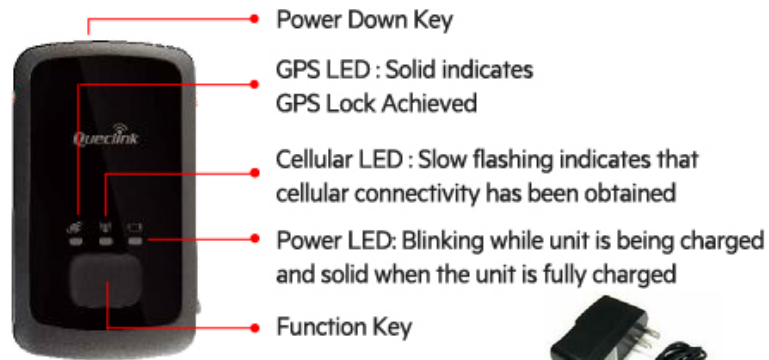


Figure 1



Figure 2

Setup (Hardware)

1. Connect the charger (part shown in Figure 2) to mains supply.
2. Open the cover for USB connection (in Figure 1) and connect the micro USB end of charger to the unit
3. The power LED (second from top) will be blinking while the unit is being charged. Once fully charged, it will be solid.
4. As soon as the charger is disconnected from the unit, the power LED will be off.
5. The Cellular LED should be slowly flashing and this indicates that connectivity has been obtained.

Setup (Tracking Service)


1. Visit <http://www.spytecinc.com/gps-activation> and complete the activation form and click the submit button when you are finished.
2. Our GPS Team will program your GPS tracking device and e-mail you the log-in credentials to use at <http://www.spytecgps.com>.

Log Into Your Account

Your login details will be e-mailed to you to the address you provided on the GPS activation form. Using the account login and password, log on to your account at <http://www.spytecgps.com> . Once the Cellular LED is flashing slowly, the device is transmitting information to the host server and you can see all the logged information.

Troubleshooting

1. If you are experiencing difficulties signing up or logging in to your GPS account please e-mail GPSactivation@spytecinc.com for immediate assistance.
2. If you are experiencing technical difficulties with your GPS tracking, please contact support.gps@spytecinc.com for immediate assistance.
3. If your GL-300 has just been setup and is incorrectly showing a location of New Jersey, please place the GL-300 by a window (or bring it outside) for 5-10 minutes so it is able to achieve its first GPS lock.

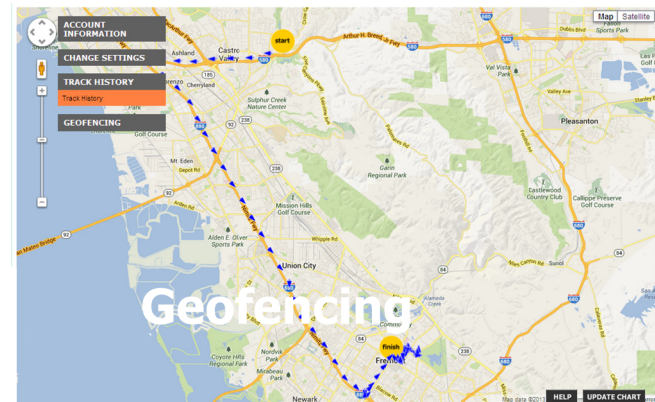

GL-300

Quick start guide



www.spytecinc.com